

TEAK FLOORING

PRODUCT SPECIFICATION SHEET





PRODUCT SPECIFICATION

TEAK DECKING

+263 86 44 212 418 / 86 44 212 997

WWW.PRIDEOFAFRICA.ZW.COM

PRIDE OF AFRICA (PVT) LTD

IDENTIFICATION	
Plank Size	80, 90, 100mm W x 1.2, 1.6 2m L x 20mm Thickness
Substrate	Solid Wood
Top Layer	Solid Wood
Grade	A
Flooring Type	Decking Tongue & Groove
m2	Packed in Bundle of 10
Finish	Raw
Edges	Bullnosed

PATTERN

RANDOM LAY STRIP



RECOMMENDATIONS	
Installation	Max 400mm joists (Professional Installer)
Floor Heating	N/A
Setting	Residential & commercial use
	Exterior
Sealer	Vesting Oil / Armadeck
Preparation	Framework - Bearers max 1500mm and joists 400mm
	All substructure to be treated timber or steel
Wastage	Overall Allowance 10%



PRODUCT SPECIFICATION

STANDARD TEAK FLOORING

+263 86 44 212 418 / 86 44 212 997

WWW.PRIDEOFAFRICA.ZW.COM

PRIDE OF AFRICA (PVT) LTD

IDENTIFICATION	
Plank Size	SEE FOLLOWING PAGE
Substrate	Solid Wood
Top Layer	Solid Wood
Grade	AB
Flooring Type	Solid Standard Floor
m2/Box	Packed in Bundle of 10
Finish	Raw (sanded after installation)
Edges	Square

PATTERN

RANDOM LAY STRIP



RECOMMENDATIONS	
Installation	Glue Down
Floor Heating	Compatible - wall to wall, max 26 degrees centigrade
Setting	Residential & commercial use
	Interior
Sealer	Vesting Oil
Preparation	Steel float screen must be dried to less than 4%
	on a teremex meter
Wastage	Overall Allowance 10%



PRODUCT SPECIFICATION

TEAK FLOORING SPECS

PRIDE OF AFRICA (PVT) LTD WWW.PRIDEOFAFRICAZW.COM +263 86 44 212 418 / 86 44 212 997

DESCRIPTION	WIDTH	LENGTH	THICKNESS
ALL BROWN T&G	120/140mm	450mm - 1200mm	20mm
ALL BROWN T&G	100mm	350mm - 1200mm	20mm
ALL BROWN T&G	90mm	350mm - 1200mm	20mm
ALL BROWN T&G	76mm/70mm	450mm - 1200mm	15mm
ALL BROWN T&G	60mm	450mm - 1200mm	15mm
SAVANNAH T&G	100/120/140mm	450mm - 1200mm	20mm
SAVANNAH T&G	90mm	450mm - 1200mm	20mm
SAVANNAH T&G	76mm	450mm - 1200mm	20mm
SAVANNAH T&G	60mm	350mm - 1200mm	15mm
CHARACTER BLOCK	variable	variable	variable





PRODUCT SPECIFICATION

TEAK FLOORING AND SKIRTING

PRIDE OF AFRICA (PVT) LTD WWW.PRIDEOFAFRICAZW.COM +263 86 44 212 418 / 86 44 212 997

DESCRIPTION	SIZE	LENGTH	THICKNESS
MINI MOSAIC ALL BROWN	480mm x 480mm	480mm	8mm
MINI MOSAIC SAVANNAH	480mm x 480mm	480mm	8mm
MINI MOSAIC CHERRY	480mm x 480mm	480mm	8mm
Traditional Parquet ALL BROWN	70/76mm	20mm	228/280mm
Traditional Parquet SAVANNAH	70/76mm	20mm	228/280mm
Traditional Parquet CHERRY	70/76mm	20mm	228/280mm
Newstyle Parquet ALL BROWN	51mm	20mm	204mm
Newstyle Parquet SAVANNAH	51mm	20mm	204mm
Newstyle Parquet CHERRY	51mm	20mm <td 204mm	

SKIRTING DESCRIPTION	SIZES
Per Running M	100mm
Per Running M	120mm
Per Running M	130/140mm
Quadrant R/M	19mm





PRODUCT SPECIFICATION

STANDARD TEAK PRE-FINISHED FLOORING

+263 86 44 212 418 / 86 44 212 997

WWW.PRIDEOFAFRICA.ZW.COM

PRIDE OF AFRICA (PVT) LTD

IDENTIFICATION	
Plank Size	CUSTOM
Substrate	Solid Wood
Top Layer	Solid Wood
Grade	AB
Flooring Type	Standard Pre-Finished Floor
m2/Box	Variable
Finish	Pre-Sanded & Pre-Finished (Vesting Oils / Acrylic Sealer)
Edges	Micro-Bevel

PATTERN

RANDOM LAY STRIP



RECOMMENDATIONS	
Installation	Glue Down
Floor Heating	Compatible - wall to wall, max 26 degrees centigrade
Setting	Residential & commercial use
	Interior
Sealer	Vesting Oil
Preparation	Steel Float Screen must be dried to less than 4%
	on a teremex meter
Wastage	Overall Allowance 10%



PRODUCT SPECIFICATION

PRE-FINISHED TEAK HERRINGBONE

+263 86 44 212 418 / 86 44 212 997

WWW.PRIDEOFAFRICA.ZW.COM

PRIDE OF AFRICA (PVT) LTD

IDENTIFICATION	
Plank Size	CUSTOM
Substrate	Solid Wood
Top Layer	Solid Wood
Grade	AB
Flooring Type	Herringbone Pre-Finished Floor
m2/Box	Variable
Finish	Pre-Sanded & Pre-Finished (Vesting Oils / Acrylic Sealer)
Edges	Micro-Bevel

PATTERN

HERRINGBONE



RECOMMENDATIONS	
Installation	Glue down
Floor Heating	Compatible - wall to wall, max 26 degrees centigrade
Setting	Residential & Commercial use
	Interior Use
Sealer	Vesting Oil
Preparation	Steel Float Screen must be dried to less than 4%
	on a teremex meter
Wastage	Over all allowance 10%



PRODUCT SPECIFICATION

PRE-FINISHED TEAK BASKETWEAVE


+263 86 44 212 418 / 86 44 212 997

WWW.PRIDEOFAFRICA.ZW.COM

PRIDE OF AFRICA (PVT) LTD

IDENTIFICATION	
Plank Size	CUSTOM
Substrate	Solid Wood
Top Layer	Solid Wood
Grade	AB
Flooring Type	Herringbone Pre-Finished Floor
m2/Box	Variable
Finish	Pre-Sanded & Pre-Finished (Vesting Oils / Acrylic Sealer)
Edges	Micro-Bevel

PATTERN
BASKETWEAVE

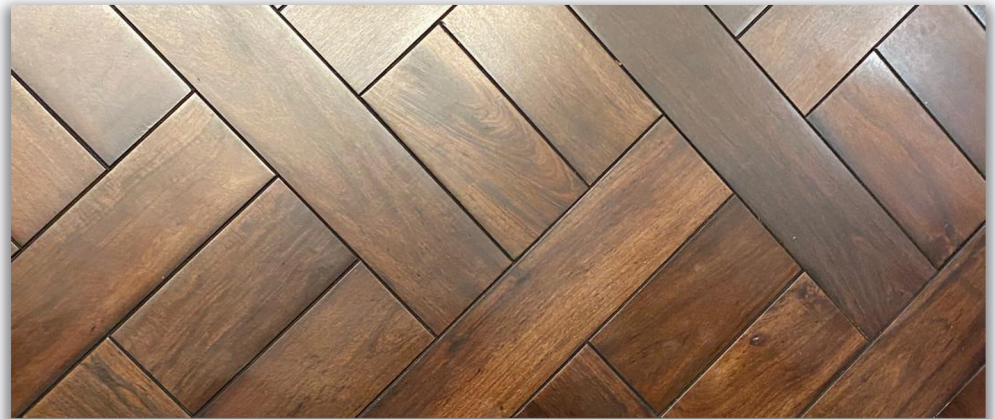

RECOMMENDATIONS	
Installation	Glue down
Floor Heating	Compatible - wall to wall, max 26 degrees centigrade
Setting	Residential & Commercial use
	Interior Use
Sealer	Vesting Oil
Preparation	Steel Float Screen must be dried to less than 4%
	on a teremex meter
Wastage	Over all allowance 10%